

# SKYVIEW™

## GRATE



Large-format slabs are a popular choice for pedestal systems due to their clean lines and efficient installation. However, relying solely on large slabs can limit creative design opportunities. Incorporating small-format pavers can provide the opportunity to add accent borders, inlays, and enhanced visual interest in roof deck designs.

Our **Skyview Grate** makes this possible. Installed on top of pedestals, it supports smaller-format pavers in a wide variety of laying patterns, just like with on grade applications. The grate also features a notch on all four corners to allow for enhanced securement to SkyView Pedestals or Low-Profile Waffles with a washer and screw.

### ✓ LIGHTWEIGHT AND HIGH STRENGTH

The perfect combination of alkalis-free fiberglass yarn and resin ensures a high strength and light weight material.

<b>Weight:</b> 66.183 lbs per unit	<b>Flexural Strength:</b> 71,213 PSI
<b>Compressive Strength:</b> 56,854 PSI	<b>Compressive Modulus:</b> 4,539 PSI
<b>Tensile Strength:</b> 75,999 PSI	<b>Tensile Modulus:</b> 4,249,605 PSI
<b>Loading Capacity:</b> 8000 lbs per grate sitting on SkyView Pedestals (500 lbs per square foot).	

### ✓ FIRE RESISTANT


The grate has a fire resistant material composition that has a CC1 fire rating based on the ASTM D635-22 test.

### ✓ CORROSION RESISTANT

With its special resin formula, the grate is resistant to acids and alkalis and can be safely used in a chemically corrosive environment.

### ✓ ANTI-AGING

The high quality matrix resin and anti-aging additive in the grate ensures exceptional durability and a long service life.

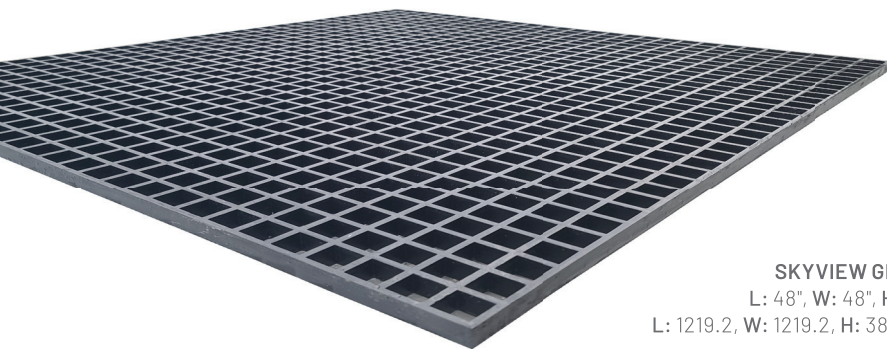

**SKYVIEW GRATE**  
L: 48", W: 48", H: 1.5"  
L: 1219.2, W: 1219.2, H: 38.1mm

**GRID SIZE**  
1.5" x 1.5" (38.1 x 38.1mm)

Any Unilock concrete paver can be used on the SkyView Grate. Visit [commercial.unilock.com](http://commercial.unilock.com) to explore our full range of pavers.

